


Apollo Compensating Stacker




Technical specifications

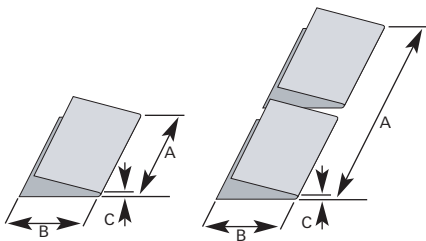

Mechanical speed		maximum 16,000 cycles per hour		
Size range		in mm (in ")		
		A maximum	450 (17 3/4)	single-sided ejection
			420 (16 1/2)	alternate delivery
		A minimum	140 (5 1/2)	
		B maximum	320 (12 5/8)	
		B minimum	100 (4)	
		C maximum	40 (1 9/16)	
		C minimum	1 (0.4)	(or 8 pages)
Layer compartment height		140 mm (5 1/2")		
Stack height		280 mm (11")		
Electrical power requirements	stacker incl. control system	0,75 kW		
Compressed air consumption	6 bar	17 Nm³/h (10 cfm at 87 psi)		
Weight		720 kg (1,580 lbs)		
Cycle time	Single-sided ejection	1.5 sec		
	Alternate delivery	1.2 sec		

Dimensions, design and equipment configuration subject to change.

- 1 Apollo Compensating Stacker model 1540
- 2 Infeed belt
- 3 Roller delivery table model 1540

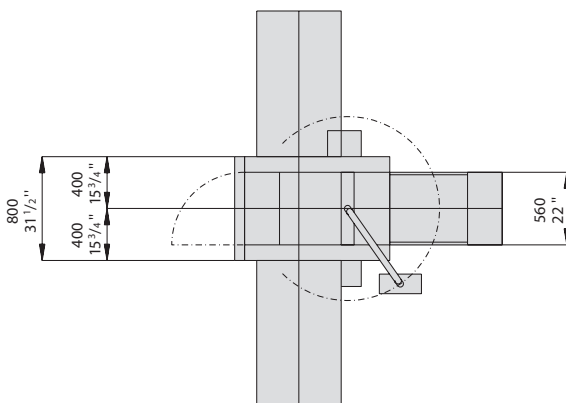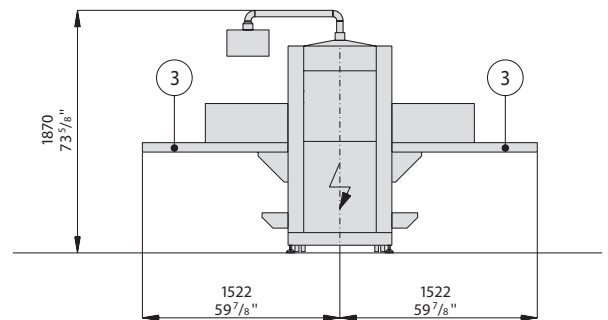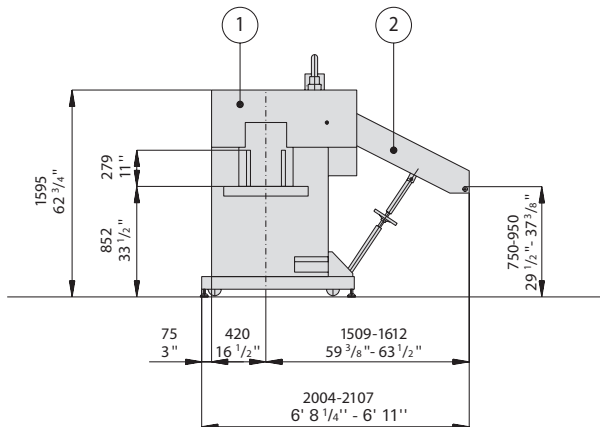

Sales and Service

Müller Martini Marketing AG
 Untere Brühlstrasse 13
 CH-4800 Zofingen, Switzerland
 Phone +41 (0)62 745 45 75
 Fax +41 (0)62 751 55 50
 info@mullermartini.com
 www.mullermartini.com