


Perfetto Stacker




Technical Data

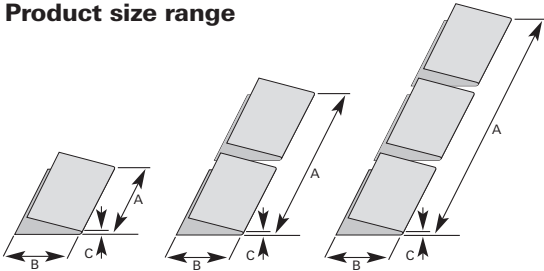

Maximum mechanical speed		16,000 cycles per hour	
Product size range		(mm)	(in ")
		A maximum	480 18 ⁷ / ₈
		A minimum	148 5 ⁷ / ₈
		B maximum	330 13
		B minimum	105 4 ¹ / ₈
		C maximum	20 ³ / ₄
		C minimum	8 pages
Layer compartment height		150 mm	5 ⁷ / ₈
Stack height		250 mm (9 ⁷ / ₈ ") maximum, 350 mm (13 ³ / ₄ ") optional	
Electrical power requirements		stacker incl. control system	2 kW
		extra per belt delivery	0.25 kW
Compressed air consumption		6 bar	8 Nm ³ /h (5 cfm at 90 psi)
Weight		900 kg (1,980 lbs)	
Cycle time		ejection to one side	1.5 sec. at an ejection speed of 0.6 m/s (2 ft/sec.)
		alternating ejection	1.1 sec. at an ejection speed of 0.6 m/s (2 ft/sec.)

Measurements, construction, and equipment are subject to change.

- 1 Infeed belt
- 2 Perfetto stacker 0450
- 3 Belt delivery
- 4 Roller delivery
- 5 Air table 0248
- 6 Optional Eltex electrostatic charging

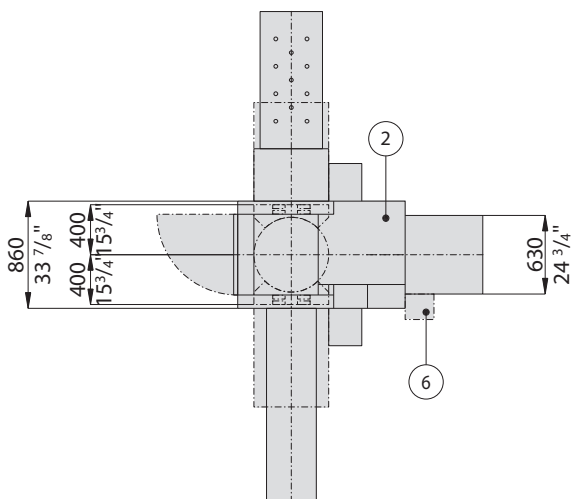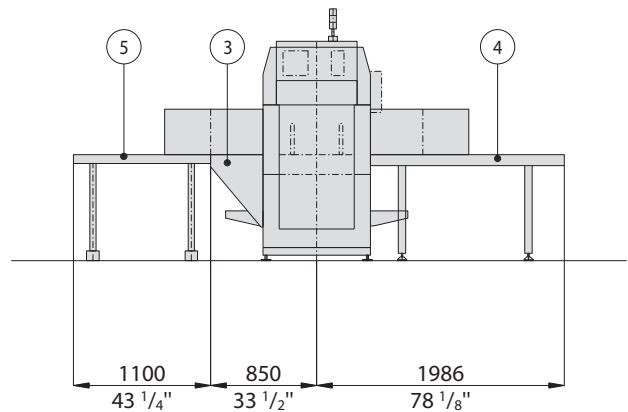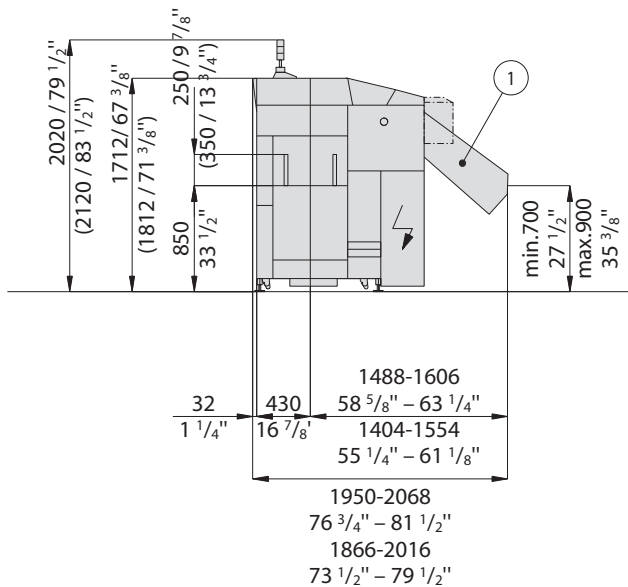

Müller Martini Marketing AG
 Untere Brühlstrasse 13
 CH-4800 Zofingen, Switzerland
 Phone +41 (0)62 745 45 75
 Fax +41 (0)62 751 55 50
 info@mullermartini.com
 www.mullermartini.com