


## **BUSCH Table Banding Machine TB 26 - new generation -**


- ☐ Machine output + 20%
- ☐ Maximum banding width enlarged to 26 cm
- ☐ Machine adjustments without any tool
- ☐ Machines manufactured in Germany

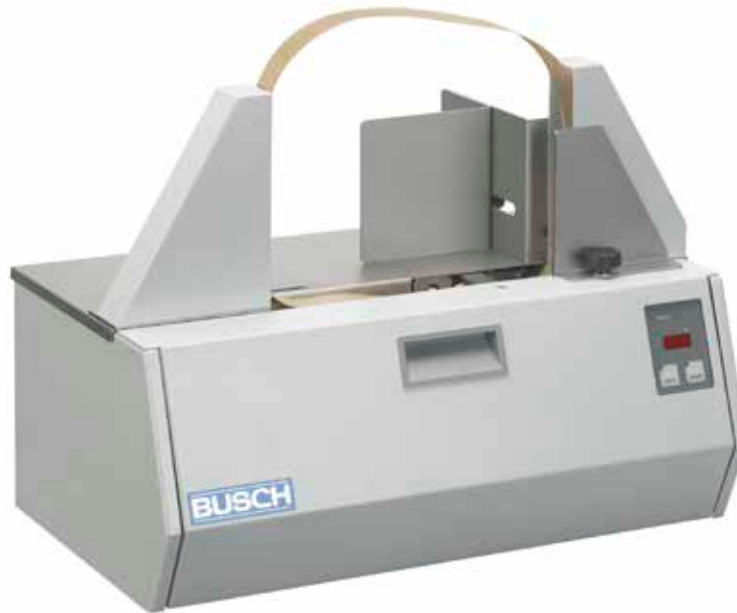

The new TB 26 is a product with high reliability guaranteeing an easy and safe operation. The machine is used for banding all types of print products with Kraft paper coated on one side (brown or white) or with transparent polypropylene foil (PP) in different widths.

### **Customer's advantages**

- ☐ Multi-purpose use
- ☐ User friendliness
- ☐ Electronic temperature control ensures constant sealing temperature
- ☐ Usable with Kraft paper or polypropylene foil available in various widths
- ☐ Banding tension infinitely adjustable by means of a scale
- ☐ Reel change with a few manual actions

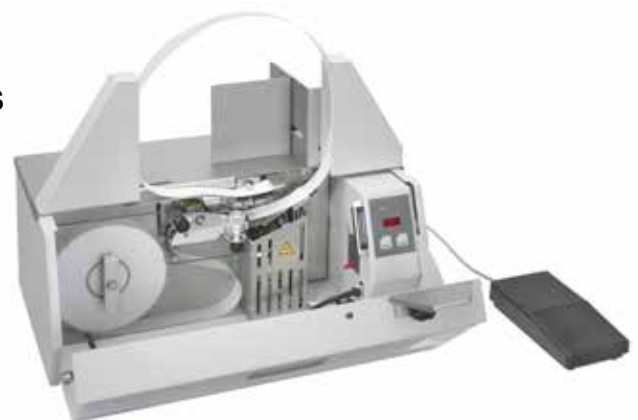

**Gerhard Busch GmbH**  
Graphische Maschinen  
D-21217 Seevetal  
Brookdamm 28

**Phone** +49 (0)40 76 91 59-0  
**Fax** +49 (0)40 76 91 59-33  
**E-mail:** [info@buschgraph.de](mailto:info@buschgraph.de)  
**Internet:** [www.buschgraph.de](http://www.buschgraph.de)

- without engagement -  
May 2012

## Technical Data

Table Banding Machine		TB 26 I	TB 26 II
Banding material		coated Kraft paper PP foil 80 µm	
Tape width		20 and 30 mm	40 and 50 mm
Tape length for Kraft paper Tape length for foil tape (PP)		approx. 150 m approx. 200 m	
Reel size / outer diameter Core diameter		max. 170 mm min. 50 mm	
Machine output		25 - 30 strokes / min.	
Max. dimensions of products to be banded - Length - Width - Height		unlimited 260 mm, Kraft paper banding 180 mm, foil tape banding 170 mm	
Machine dimensions (l x w x h)		506 / 323 / 390 mm	
Weight net / gross		25 kg / 28 kg	
Sound pressure level as per EN 13023 : 2003		75 dB(A) max.	
Power requirements A.C. single-phase	230V 50Hz	160 Watt	
	110V 60Hz	160 Watt	
Power consumption	230V 50Hz	0.7 A	
	110V 60Hz	1.5 A	



### TB 26 with large reel stand, height adjustable

For banding jobs of larger volumes we offer a movable large reel stand (GRS) - height adjustable - to avoid frequent reel changes.

The GRS stands on 4 castors, two of which can be fixed. One power supply drives both, the table banding machine and the large reel stand.

Tape length for Kraft paper	800 m
Tape length for PP-foil	1200 m
Reel size / outer diameter	400 mm
Core diameter	50 mm