




«BLSD 650» Book Stacker

Technical Specifications


Book sizes 	A max.	285 mm (11¼")
	A min.	100 mm (4")
	B max.	390 mm (15¾")
	B min.	115 mm (4½")
	C max.	90 mm (3½")
	C min.	5 mm (¾")
Offsetting of pile	max.	25 mm (1")
	min.	0 mm (0")
Output	1800 – 3900 books/hour	
Pile height	max.	340 mm (13¾") (number of books can be chosen in advance)
Degree of rotation	90° and 180°	
Electrical requirement	400/230 V, 50/60 cycles (other voltages on request)	
Power consumption	2 kW	
Compressed air requirement	2,5 Nm³/h at 6 bar (1.5 cfm at 87 psi)	
Weight	850 kg (1870 lbs) (incl. infeed and delivery conveyors)	

Design, measurements and specifications subject to change.

«BLSD 650 D» Straight-through Stacker

Standard: Delivery conveyor (1200 mm, 3' 11¼")


Option: Delivery conveyor (1700 mm, 5' 7")

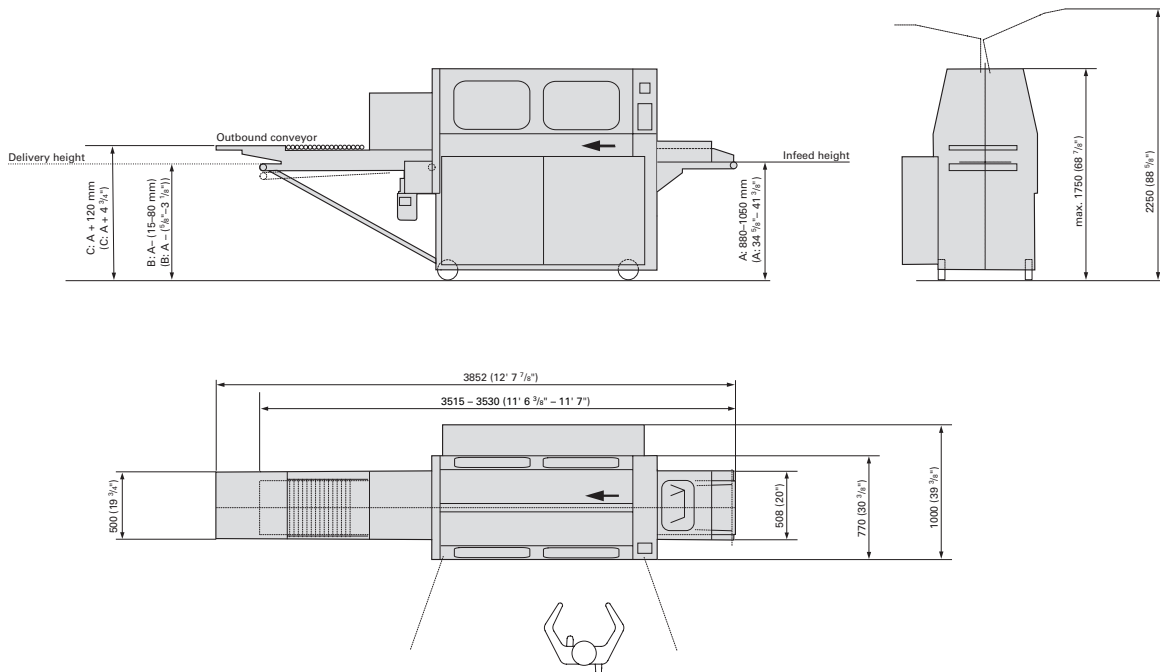

«BLSD 650» End Stacker

Standard: Infeed conveyor (700 mm, 2' 3½")

Option: Infeed conveyor (1200 mm, 3' 11¼")

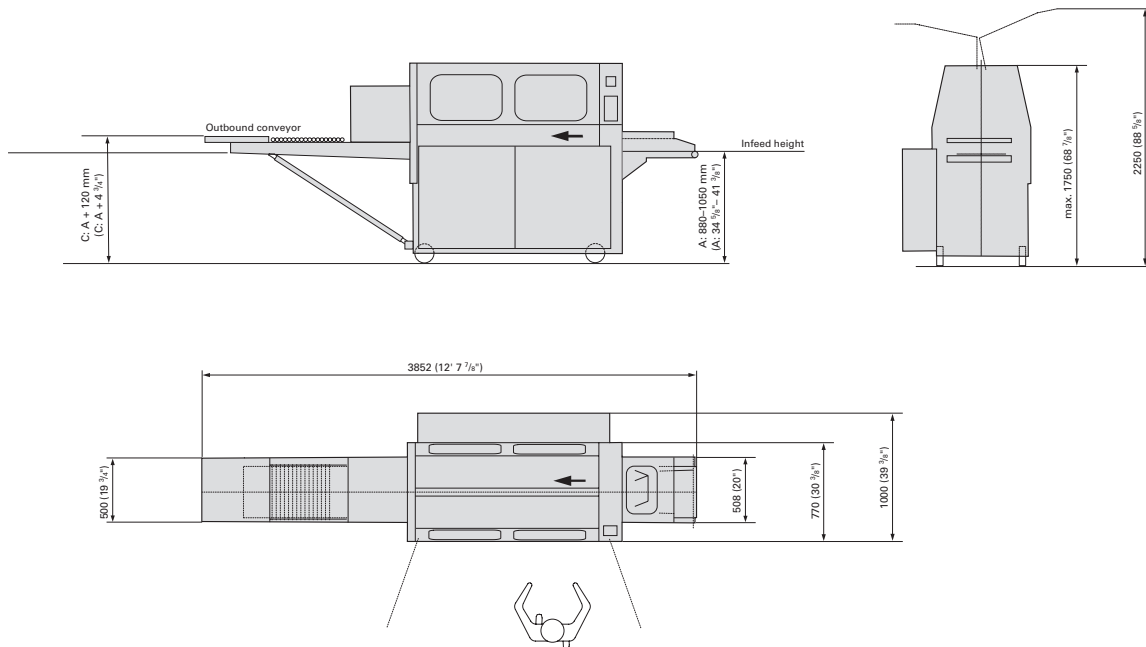

MÜLLER MARTINI

Müller Martini Marketing AG

Untere Brühlstrasse 13

CH-4800 Zofingen, Switzerland

Phone ++41 62 745 45 75

Fax ++41 62 751 55 50

E-mail info@mullermartini.com

Internet <http://www.mullermartini.com>